



PORTABLE METAL DETECTOR RE-PMD-2VS

Introduction India

Eirst Time In Detects Fire Arms, Ammunition even concealed in Ferrite Rod

SALIENT FEATURES

Search Zone Search Coil enclosed in collapsible

rigid PVC Pipe/Telescopic rigid PVC pipe.(Optional)

Control Unit Control unit with advance features.

Sensitivity M.S. 80 x 55 x 20 mm at level 3.

Detection Indication A) Variable pitch audio through Micro-controller

with mute facility.

B) 3 LED's for large visual indication.

Optical Sensor Will facilitate detection of metal only when a person

passes through the sensing zone. Avoid detection of metal movement out side detection zone using single sided sensor and single connector for sensor

as well as coil.

Counters Counting of no. Of persons passing the sensing zone

& no. Of detection for reference & analysis by superiors.

RS - 232 - Interface For downloading the data with PC. (Optional)

TECHNICAL SPECIFICATIONS

Principle of detection : Eddy current based energy absorption

Dimensions : Search coil - 900 x 1900 mm approx.

Sensitivity setting : Users selectable 9 level setting

Indications : LED bar graph on display

3 LED's for large visual indication

Power : 1.230 VAC Single Phase


2.6 V maintenance free battery back up with charger

Environmental conditions: - 10 to + 50 C

USED IN: Defence services, Police establishments, Factory watch & ward & Security services

TO KEEP PACE WITH LATEST TECHNOLOGY, "RELIANCE ELECTRONICS" RESERVES THE RIGHT TO UPDATE THE SYSTEM. HENCE SPECIFICATION ARE SUBJECT TO CHANGE



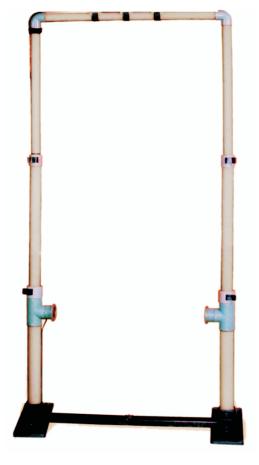



RELIANCE ELECTRONICS

Office: G-1,Hiranyamayee Soc.,Opp. Hotel Natraj Nashik - Pune Road,NASHIK ROAD - 422101 Works: D -1/2,MIDC,Ambad,NASHIK - 422010

Tel: (W) +91-253-2384345/46,6513248 fax: +91-253-2384347 Email: support@reliance-india.com, Web: www.reliance-india.com

MANUFACTURER OF METAL DETECTORS, SECURITY EQUIPMENTS & ELECTRONIC INSTRUMENTS